

This document provides additional assistance with wiring and configuring the Extron Annotator to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific Extron product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type: Touch Tablet
Manufacturer: Wacom
Firmware Version: N/A
Model(s): CTE 650

Version History:

Driver Version	Date	Annotator Firmware	SPPCP Version	Notes
1	8/27/2010	1.02	3.0.0	Initial version.

Driver Notes:

- Calibration is required before any touch information is properly recognized by the Annotator.
- Use the calibration cutout at the end of this document to correctly align the tablet during calibration.


Models Tested:

- CTE 650

Calibration Tools and Instructions:

The touch accuracy can be calibrated using the Calibrate Panels setting in the Advanced configuration menu.

1. Within the Advanced configuration menu press Next to cycle to Calibrate Panels.
2. Press size and observe the touch panel screen. A cross appears in the upper left corner.
3. Tap the screen at the cross, which then moves to the top right corner.
4. Tap the second cross. This moves to the bottom right corner.
5. Tap the third cross. This moves to the bottom left corner.
6. Tap the fourth cross. The unit saves the calibration data and restarts the sequence.
7. Repeat the process for each connected touch screen.
8. Press any front panel button to exit the sequence and save the data.

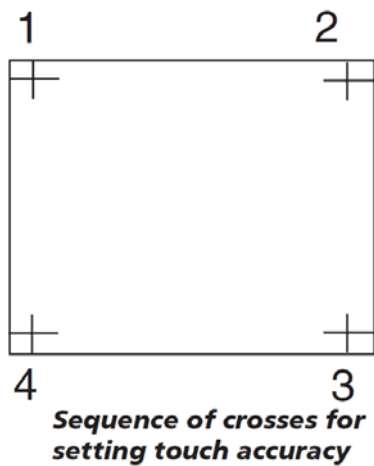

Cable and Adapter Requirements:

M/M USB Type A to Type B

General Notes:**Calibration Alignment Cutout:**

Cut out the graphic below and place on the touch tablet to aide with alignment during the calibration process. The cutout must line up with the writing area of the tablet.

NOTE: When printing the document in Adobe Acrobat, set Page Scaling to None to maintain the proper size of the graphic below.

WACOM BAMBOO CALIBRATION OVERLAY:

